



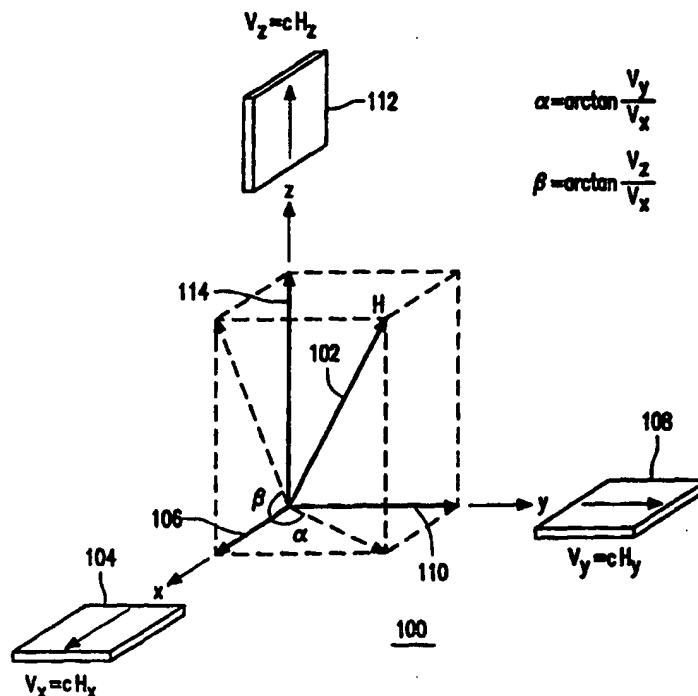
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06K 11/18, G06F 3/033	A1	(11) International Publication Number: WO 99/03060 (43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/IB98/00690 (22) International Filing Date: 11 May 1998 (11.05.98) (30) Priority Data: 97202104.2 8 July 1997 (08.07.97) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: LENSSEN, Kars-Michiel, Hubert; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). LAMBRECHTS, Marc, Emiel, Celine; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VOS, Gerardus, Johannes, Josephus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: GROENENDAAL, Antonius, W., M.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: INPUT DEVICE

(57) Abstract

An input device (302, 316) comprises a plurality of magnetic sensors (104, 108, 112) for measuring the components (106, 110, 114) of a magnetic field (102) at the position of the input device (302). The magnetic field may be the geomagnetic field of the earth or a magnetic field generated by a local magnet (602). The data of at least two (104, 108) of the sensors are used for calculating a first signal (208) for controlling the translation movement of a graphical element (204) on a display (202).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Input device.

The invention relates to a method for controlling a graphical element on a display through manipulation of an input device, the method comprising:

- a measuring step measuring a plurality of components of a magnetic field related to an orientation of the input device, and
- 5 - a control step controlling the graphical element on the basis of the plurality of components.

The invention further relates to an input device for controlling a graphical element on a display, the input device comprising:

- a plurality of sensors for measuring respective components of a magnetic field
- 10 related to an orientation of the input device, and
- a controller for controlling the graphical element on the basis of the plurality of components.

Such a method and input device are described in United States Patent 5,394,028. According to the known method, the orientation of an input device is determined

15 by measuring the magnetic field at the position of the input device. This magnetic field may be the earth's geomagnetic field or a local magnetic field. The input device has three mutually orthogonal groups of Hall sensors, one for each direction of the magnetic field. The output of each of the groups is amplified and after an analogue to digital conversion sent to a computer as three separate signals. Each of the three signals represents a respective

20 component of the magnetic field and the signals represent respectively the pitch, the roll and the yaw of the input device. The known system controls computer graphics on a display in accordance with the pitch, roll and yaw signals from the input device.

It is an object of the invention to provide a method of the kind set forth which improves the control of the graphics on the display. This object is achieved according

25 to the invention in a method that is characterised in that the control step includes a calculation step calculating a first signal on the basis of at least two of the plurality of components, the first signal representing translation movement of the graphical element in a first direction on the display. In this way, the method can be applied in moving an indicator to a particular position on the display and, through that action, pointing to a particular object

among a number of objects on the display. The movements of the input device control the movements of the indicator on the display. Pointing to an object may be followed by some confirmation step, selecting the particular object from among the number of objects. The indicator may be a cursor, like an arrow, for pointing to a button on a menu of buttons
5 representing tasks or information items in an application program. The moving indicator may also be implemented as a moving highlight or other indicative measure along a row of selectable objects. Furthermore, the graphical element so controlled may be a more complex object than the indicator. It may be an animated object on the display, like a car or a plane, the translation movement of which is controlled by the translation movement of the input
10 device. The graphical element may also be an animated character that is guided through a virtual world on the display, whereby the guidance includes the translation movement controlled by the input device.

It is known as such to control the position of a cursor on a display through determining the orientation of an input device. United States Patent 5,440,326
15 describes an input device equipped with a gyroscope to sense changes in the orientation of the device. Through these changes a cursor on a computer display is controlled. The gyroscope is driven by a motor requiring a relatively large amount of power. The gyroscope is complicated to manufacture and is relatively expensive. Furthermore, the input device with the gyroscope experiences an intrinsic, continuous drift, resulting in a movement of the
20 cursor on the display while the input device is held still. The input device according to the invention is very different from the known input device of the reference in that it is based on a different principle of sensing its orientation. The orientation of the device according to the invention is determined by measuring the magnetic field around the input device. This avoids the above mentioned drawbacks: the device requires a small amount of power, is easier to
25 manufacture and experiences no drift. Furthermore, the size of the input device according to the invention can be very small compared to the known device.

An embodiment of the method according to the invention is defined in Claim 2. By calculating a second signal for controlling the graphical element in a second direction on the display, full control of the graphical element on the display is possible.

30 An embodiment of the method according to the invention is defined in Claim 3. The initialisation step provides a reference orientation for the input device. Subsequent changes in the orientation of the input device are calculated with respect to this reference position. Such a reference orientation can for example be the orientation of the input device while the user points towards the centre of the display. The actual trigger for

executing the initialisation step can be chosen from various possibilities. This could be when the device is activated, e.g. switched on or lifted from a resting place, thus immediately providing a reference position. Additionally, or alternatively, the initialisation step could be executed at the request of the user, e.g. through pressing a button arranged for this purpose.

- 5 Also the execution of the initialisation step could be triggered by an external event, e.g. a sudden disturbance in the magnetic field.

An embodiment of the method according to the invention is defined in Claim 5. Such generated field can be designed to be stronger than the permanent geomagnetic field. The orientation of the input device can then be detected in a more reliable
10 manner, which is less susceptible to disturbances.

It is a further object of the invention to provide an input device of the kind set forth which allows improved control of the graphics compared to the known input device. This object is achieved according to the invention in an input device which is characterised in that the controller includes calculation means for calculating a first signal on
15 the basis of data from at least two of the plurality of sensors, the first signal representing translation movement of the graphical element in a first direction on the display. The input device according to the invention allows the control of a graphical element on the display. This can be used for pointing and selecting objects from among a plurality of objects on the display and for controlling an animated object or character on the display. Furthermore, the
20 input device according to the invention is less sensitive to disturbances than the known input device because it combines data from two components of the magnetic field into one control signal. A disturbance in a first one of the components will not be fully passed on to the control signal but will be mitigated by the second one of the components.

An embodiment of the input device according to the invention is defined
25 in Claim 8. Through the reset means a reference orientation of the input device may be determined. The control signal for the graphical element is based on the comparison between a subsequent orientation of the input device and the reference orientation. The reset means may be activated through a dedicated reset button on the device or through a switch that is switched on when the input device is lifted from its rest position. An example is where the
30 user of the input apparatus operates the reset button while pointing towards the centre of the display, thus making that orientation the reference orientation. When the user subsequently points away from the centre, the graphical element on the display will move away from the centre in the same direction as the input device. Additionally, or alternatively to activating the reset means through a reset button or a switch, the reset means may be activated when a

disturbance in the magnetic field is determined. In that way, the disturbance has no erroneous impact on the movement of the indicator and the input device is rendered operational again with a new reference orientation.

5 An embodiment of the input device according to the invention is defined in Claim 9. An MR sensor is a sensitive and suitable sensor for measuring a small magnetic field. This is in particular advantageous if the geomagnetic field is employed in the input device.

10 An embodiment of the input device according to the invention is defined in Claim 10. An MR sensor is sensitive in the plane of the sensor. Two MR sensors can be arranged on a single, flat substrate for measuring the magnetic field in two directions in the plane of the substrate. A Hall sensor is sensitive for the magnetic field perpendicular to the plane of the sensor. The Hall sensor can be arranged on the same substrate as the two MR sensors for measuring the magnetic field in the direction perpendicular to the plane of the substrate. So each of the three sensor measures one of the three orthogonal directions of the magnetic field. In an embodiment, each of the sensors is manufactured separately and is subsequently attached to the common substrate at the desired position, e.g. as in a so-called MCM (Multi Chip Module). Later assembly of the input device only requires the single common substrate and does not require further assembly of different substrates into the input device. An alternative embodiment is where the three sensors are directly manufactured on 20 the same common substrate, e.g. a silicon wafer. The advantages are that only a single manufacturing process is required and that the positioning and alignment of the sensors can easily be realised in that process.

Further advantageous embodiments of the invention are recited in dependent claims.

25 The invention and its attendant advantages will be further elucidated with the aid of exemplary embodiments and the accompanying schematic drawings, whereby:

Figure 1 schematically shows the principle of operation of the input device according to the invention,

30 Figure 2 shows the translation movement according to the invention of a graphical element on the display,

Figure 3 schematically shows an input device according to the invention,

Figure 4 schematically shows an alternative embodiment of the input device according to the invention,

Figure 5 schematically shows an arrangement of the sensors of the input

device on a single substrate, and

Figure 6 shows an overview of the arrangement of the input device using a magnet for generating the magnetic field.

Corresponding features in the various Figures are denoted by the same
5 reference symbols.

Figure 1 schematically shows the principle of operation of the input device according to the invention. The input device 100 is arranged to measure the three orthogonal components of magnetic field 102. This magnetic field may be the geomagnetic field of the earth or a local magnetic field, specifically generated by the input device. The
10 input device comprises a sensor 104 for measuring the H_x component 106, a sensor 108 for measuring the H_y component 110 and a sensor 112 for measuring the H_z component 114. The sensors in Figure 1 are implemented as AMR (anisotropic magnetoresistive) sensors by way of example. Other types of sensors are also feasible. The sensors produce a signal that is proportional to the respective measured component of the magnetic field. The value of the
15 output signal for a given magnetic field depends on the construction of the sensor and may be different among the three sensors. An MR sensor is sensitive to a magnetic field in a particular direction in the plane of the sensor and produces a signal that is proportional to the magnetic field in that direction. The signal V_x of sensor 104 is proportional to the strength of the H_x component of the magnetic field, the signal V_y of sensor 108 is proportional to the
20 strength of the H_y component of the magnetic field, and the signal V_z of sensor 112 is proportional to the strength of the H_z component of the magnetic field. The output signals will be further processed and used to control a graphical element on the display of the system for which the input device is operative. When the orientation of the input device changes to a new position, the three sensors and the shown co-ordinate system will take a new position
25 with respect to the magnetic field 102. In dependence on the change of orientation, the measured components will change, resulting in new output signals from which the new position can be calculated. If the magnetic field would be produced by a local magnet, the orientation of the magnetic field with respect to the input device may also be changed by changing the orientation of the local magnet. This will result in a similar way to new output
30 signals obtained from the sensors. So in the case of a magnetic field that is locally generated, as opposed to the magnetic field of the earth, there is a design choice for the input device for changing the orientation of the magnetic field with respect to the sensors. The part of the input device generating the magnetic field may be stationary and the part with the sensors freely movable, or the part with the sensors may be stationary and the part generating the

field freely movable.

The input device of Figure 1 provides three sensor output signals carrying the information on the orientation of the input device with respect to the magnetic field.

According to the invention, these three sensor output signals are reduced to two signals

5 representing translation movement of a graphical element on the display. A simple way of calculating the two signals is given in the following formulae:

$$X = \sin \left(\arctan \frac{V_y}{V_x} \right) = \frac{\frac{V_y}{V_x}}{\sqrt{1 + \frac{V_y^2}{V_x^2}}} = \frac{V_y}{\sqrt{V_x^2 + V_y^2}} \quad (1)$$

$$10 \quad Y = \sin \left(\arctan \frac{V_z}{V_x} \right) = \frac{\frac{V_z}{V_x}}{\sqrt{1 + \frac{V_z^2}{V_x^2}}} = \frac{V_z}{\sqrt{V_x^2 + V_z^2}} \quad (2)$$

In this embodiment, an additional sine-function has been applied for obtaining the X-signal and the Y-signal. An alternative calculation would be to omit the sine-function. Furthermore, respective scale factors may be applied in the formulae in order to obtain an appropriate

15 scale for the translation movement of the graphical element on the display.

In an alternative embodiment, the X-signal and the Y-signal are calculated with respect to a reference orientation of the input device. To this end, the input device is reset in the desired reference orientation and the respective output signals V_{x0} , V_{y0} and V_{z0} of the sensors are determined and stored for subsequent calculations. The X-signal and the

20 Y-signal are then obtained according to the following formulae:

$$X = \frac{V_{x0}V_y - V_{y0}V_x}{\sqrt{V_x^2 + V_y^2} \cdot \sqrt{V_{x0}^2 + V_{y0}^2}} \quad (3)$$

$$Y = \frac{V_{x0}V_z - V_{z0}V_x}{\sqrt{V_x^2 + V_z^2} \cdot \sqrt{V_{x0}^2 + V_{z0}^2}} \quad (4)$$

In cases where the overall strength of the magnetic field is substantially the same for different positions of the input device, e.g. in the case of the geomagnetic field, the formulae (3) and (4) can be reduced to:

$$X = \frac{V_{x0}V_y - V_{y0}V_x}{V_x^2 + V_y^2} \quad (5)$$

$$Y = \frac{V_{x0}V_z - V_{z0}V_x}{V_x^2 + V_z^2} \quad (6)$$

10

Figure 2 shows the translation movement according to the invention of a graphical element on the display. On a display 202 a graphical element 204 is displayed. This graphical element may be implemented as cursor, e.g. in the form of an arrow, cross or other symbol. However the cursor may also be implemented as some highlight moving across objects on the display, whereby the particular object is highlighted which is being pointed to. Furthermore, the graphical element may be a more complex image representing an object on the display. The graphical element 204 is moved in the horizontal direction 206 in response to the X-signal 208 and is moved in the vertical direction 210 in response to the Y-signal 212. The actual movement in a certain direction in response to the respective signal may be implemented in different ways. It is possible that the graphical element assumes a position along that direction in direct proportion to the signal. When the signal is zero, the graphical element is at its reference position, e.g. the centre of the display, and when the signal has a certain value the graphical element assumes a position corresponding to that value and remains there as long as the signal has that value. In this implementation, the graphical element follows the movements of the input device in a direct correspondence. An alternative implementation is where the value of the signal is used as a switch activating the movement of the graphical element. As long as the value of the signal is zero, the graphical

element remains at its latest position along the respective direction. When the signal has a certain value it moves with a certain speed, e.g. in proportion to the value of the signal, and does so until the signal value changes. In this implementation the input device operates similar to an accelerator pedal and the actual position of the graphical element has no

5 correspondence to the actual signal value.

The X-signal and Y-signal generated by the input device according to the invention are representing respective translation movements. How these signals are exploited in an application running on the system to which the input device is connected, is determined by the specific application. The application may exploit the signal to control the translation
10 movement of the graphical element in one of the ways described above. However, the application may also use the signal to generate a different, potentially more complex movement of the graphical element.

The input device according to the invention may have a reset function providing a new reference orientation for the movements of the graphical element. Resetting
15 the input device may involve two separate actions. The output values corresponding to the orientation at the moment of the reset are determined and stored for subsequent measurements. These values are then used as an offset values in the subsequent calculations. Furthermore, resetting the input device may move the graphical element, e.g. the cursor, to a predetermined reference position, for example the centre of the display, the upper left
20 corner of the display or at the first object of a row of objects on the display. In order to execute the reset function, the input device may be provided with a dedicated reset button to be operated by the user of the device. When the user holds the input device with a suitable orientation, he may operate the reset function and in that way defining this suitable orientation as the reference orientation. The reset function may also be executed when the
25 input device is activated. This can be realised as a switch which is activated when the user lifts the input device from its rest position. The reset function may also be executed automatically in case of a disturbance resulting in a relative large change in the overall strength of the magnetic field. The input device of that embodiment monitors the strength of the magnetic field and when this differs too much from the reference values, the reset
30 function is executed again. To this end, it is determined whether one of the following conditions is fulfilled:

$$V_x^2 + V_y^2 + V_z^2 > (1+\delta) \cdot (V_{x0}^2 + V_{y0}^2 + V_{z0}^2) \quad (7)$$

$$V_x^2 + V_y^2 + V_z^2 < (1-\delta) \cdot (V_{x0}^2 + V_{y0}^2 + V_{z0}^2) \quad (8)$$

In these formulae, the symbol δ defines a threshold for the allowable variation in the strength of the magnetic field.

- 5 In the example in Figures 1 and 2, the two components of the magnetic field from which the signal for controlling the graphical element are calculated, are orthogonal components. This is not necessary for application of the invention and the two components may have a different mutual angle. It is a sufficient condition that the two components are not dependent to each other, i.e. that they do not completely extend in the same direction. The combination of two components into a single signal for controlling the translation movement of the graphical element makes the signal less dependent on disturbances in the magnetic field. An error in one the components, due to a disturbance, is not fully passed on to the signal but its effect is mitigated due the other component. This can also be seen from the various formulae for calculating the X-signal or the Y-signal, e.g.
- 10
- 15 formulae (1) and (2)

- Figure 3 schematically shows an input device according to the invention. A freely movable handheld part 302 comprises the sensors 104, 108 and 112 and a controller 304 controlling the graphical element on the basis of output signals of the sensors. The input device further comprises calculation means 306 for calculating the X-signal and the Y-signal and reset means 308 for resetting the input device to a reference orientation. The reset means are operated through a switch 310 which may be implemented as a user operable push button or as part of an activation switch activating the device. The device further comprises a storage 312 for storing the output signals of the sensors at the time of a reset, for later use as reference values. The calculated X-signal and Y-signal are transmitted from the handheld part through a transmitter 314 to the stationary part 316 near a display 318 on which the graphical element is to be moved. In the stationary part 316, the signals are received in a receiver 320 and are transferred to the display via interface 322. The transmitter 314 and receiver 320 may be implemented as an infrared sending/receiving device or as a radio-frequency sending/receiving device. Alternatively, the movable part 302 may be connected via a wire to the stationary thus avoiding the need for a transmitter and a receiver. However, this will limit the movements of the handheld part 302 to a certain extent. In the example shown in Figure 3, most of the elements of the input device reside in the freely movable handheld part 302 and this part transmits the X-signal, the Y-signal and a command for
- 20
- 25
- 30

moving the graphical element to the reference position.

Figure 4 schematically shows an alternative embodiment of the input device according to the invention. In this embodiment, the handheld part 302 comprises the sensors 104, 108 and 112, the reset switch 310 and the transmitter 314. The other elements
5 now reside in the stationary part 316 of the input device. The handheld part transmits the sensor output signals V_x , V_y and V_z and, if applicable, the fact that the reset switch has been activated to the stationary part.

Figure 5 schematically shows an arrangement of the sensors of the input device on a single substrate. The input device comprises a substrate 502, for instance of
10 silicon, on which 3 sensors have been assembled. Sensor 504 is an MR sensor which has been made sensitive for measuring a magnetic field in direction 506 and sensor 508 is also an MR sensor, but this one is made sensitive for measuring a field in direction 510. Sensor 512 is a Hall sensor which is sensitive in direction 514, perpendicular to the substrate. So the three sensors can each measure an orthogonal component of the magnetic field through the
15 substrate and can therefore be used as the sensors in the input device according to the invention. It is advantageous to manufacture the three sensors on a single substrate because in this way they can be realised in a single manufacturing step. There is no need to later assemble different substrates, each carrying one or two sensors, together for the manufacture of the input device. The substrate 502 can further comprise the sensor connection wires and
20 additional circuitry 516, implementing the required elements like the controller 304, the calculation means 306, the reset means 308, the storage 312 and the transmitter 314. This further eases the manufacturing process of the input device and reduces the production costs.

Figure 6 shows an overview of the arrangement of the input device using a magnet for generating the magnetic field. A magnet 602, this may be either a permanent
25 magnet or an electromagnet generates a magnetic field 604. The movable part 302 of the input device has a certain orientation with respect to the magnetic field, resulting in specific values measured by the three sensors. The movable part 302 transmits its signals to the stationary part 316 which delivers the control signal to display 318 for moving the indicator. In an embodiment of the input device according to the invention, the magnet is realised as a
30 bracelet on the wrist of the user and the movable part 302 as a ring on a finger of the corresponding hand. The graphical element on the display is controlled by simple movements of that finger because the orientation of the movable part 302 then changes with respect to the magnetic field in correspondence with the movements. The function of the bracelet and the ring could simply be interchanged, resulting in the arrangement in which the ring

includes a magnet and the bracelet includes the sensor sensing changes of the magnet field. Also in this arrangement, the graphical element is controlled through movements of the finger with ring relative to the wrist with the bracelet.

5 In an alternative embodiment, the magnet 602 is arranged in the stationary part 316, thus forming a single stationary part of the input device. In this embodiment, the input device according to the invention still comprises only two part despite the fact that a magnet is used for generating the magnetic field.

CLAIMS:

1. A method for controlling a graphical element on a display through manipulation of an input device, the method comprising:
 - a measuring step measuring a plurality of components of a magnetic field related to an orientation of the input device, and
- 5 - a control step controlling the graphical element on the basis of the plurality of components,
characterised in that the control step includes a calculation step calculating a first signal on the basis of at least two of the plurality of components, the first signal representing translation movement of the graphical element in a first direction on the display.
- 10 2. A method as claimed in Claim 1, wherein the calculation step further includes calculating a second signal on the basis of at least two of the plurality of components, at least one of the at least two being different from the at least two components for calculating the first signal, the second signal representing translation movement of the graphical element in a second direction on the display.
- 15 3. A method as claimed in Claim 1, wherein the control step includes an initialisation step measuring reference values of the plurality of components with respect to the orientation of the input device at the instant of executing the initialisation step, and wherein the calculating step calculates the first signal on the basis of a difference between current values and reference values of respective ones of the at least two of the plurality of
- 20 components.
4. A method as claimed in Claim 3, wherein the measuring step measures three components of the magnetic field thus measuring the strength of the magnetic field, and wherein the initialisation step is executed if the difference in strength between two successive executions of the measuring step is larger than a predetermined threshold.
- 25 5. A method as claimed in Claim 1, wherein the magnetic field is generated by a permanent magnet or an electromagnet.
6. An input device for controlling a graphical element on a display, the input device comprising:
 - a plurality of sensors for measuring respective components of a magnetic field

related to an orientation of the input device, and

- a controller for controlling the graphical element on the basis of the plurality of components,

characterised in that the controller includes calculation means for calculating a first signal on the basis of data from at least two of the plurality of sensors, the first signal representing translation movement of the graphical element in a first direction on the display.

7. An input device as claimed in Claim 6, wherein the calculation means are further arranged for calculating a second signal on the basis of data from at least two of the plurality of sensors, at least one of the at least two being different from the at least two sensors for calculating the first signal, the second signal representing translation movement of the graphical element in a second direction on the display.

8. An input device as claimed in Claim 6, further comprising reset means for measuring reference data of the plurality of sensors with respect to the orientation of the input device, and wherein the calculating means are arranged for calculating the first signal on the basis of a difference between current data and the reference data of respective ones of the at least two of the plurality of sensors.

9. An input device as claimed in Claim 6, wherein at least one of the plurality of sensors is an MR (magnetoresistive) sensor.

10. An input device as claimed in Claim 6, wherein two of the plurality of sensors comprise an MR sensor and wherein a third of the plurality of sensors comprises a Hall sensor, the three sensors being manufactured on a single substrate.

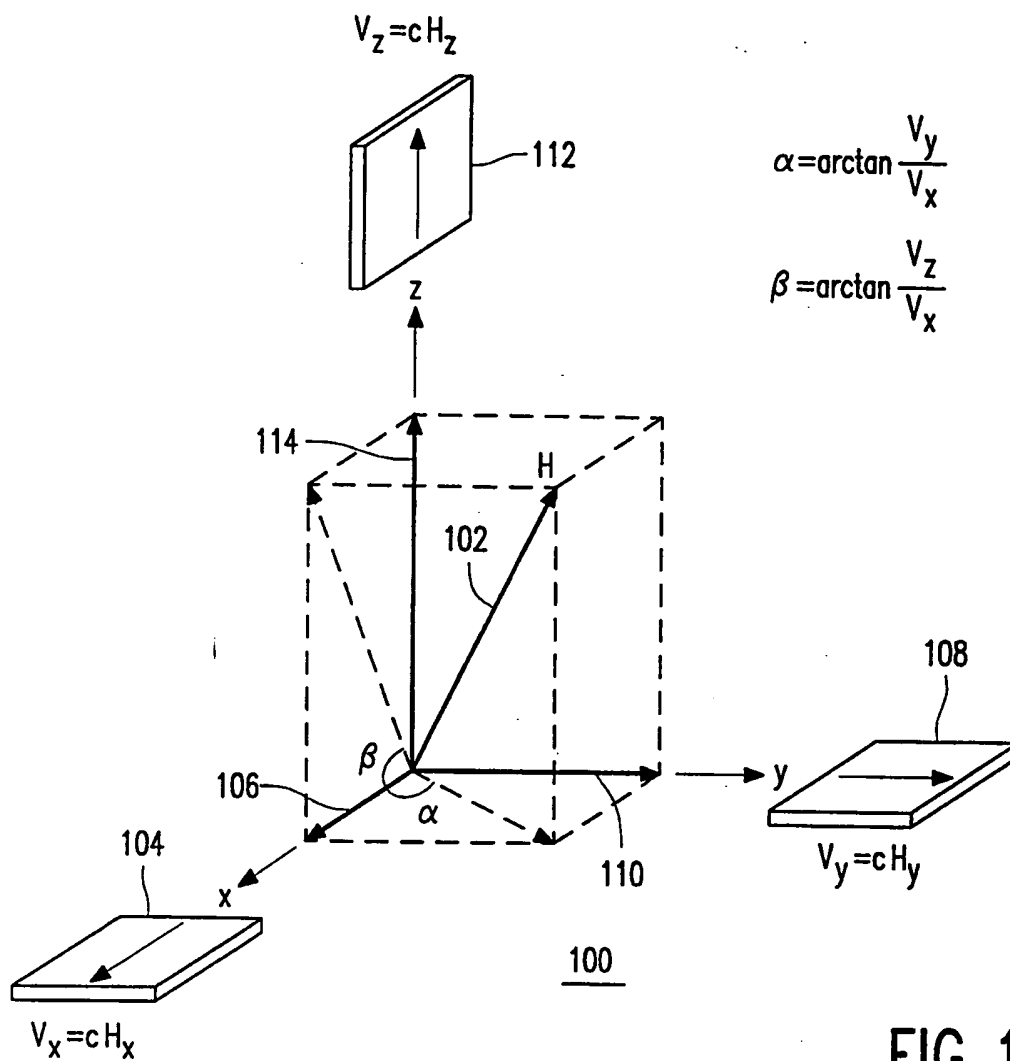
$$1/3$$


FIG. 1

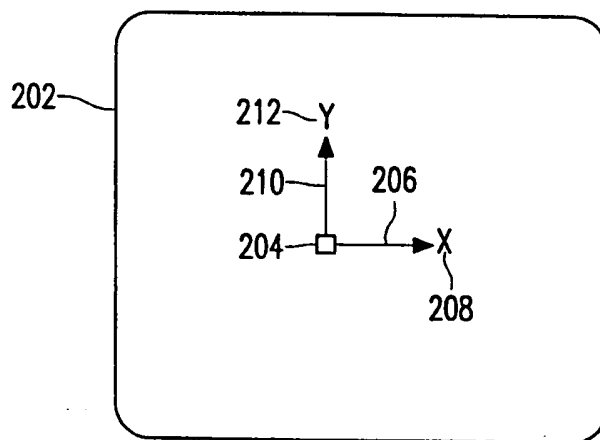


FIG. 2

2/3

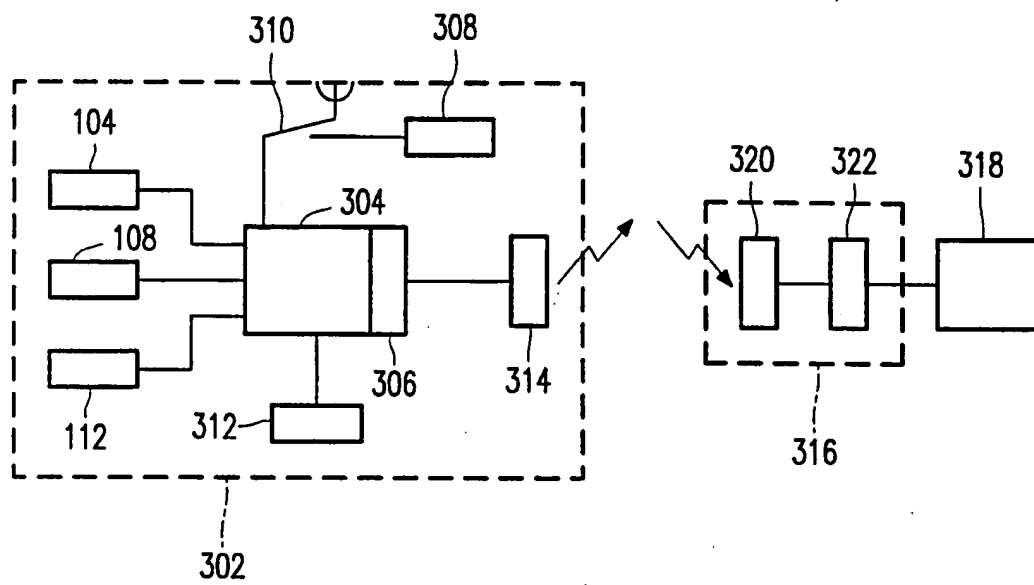


FIG. 3

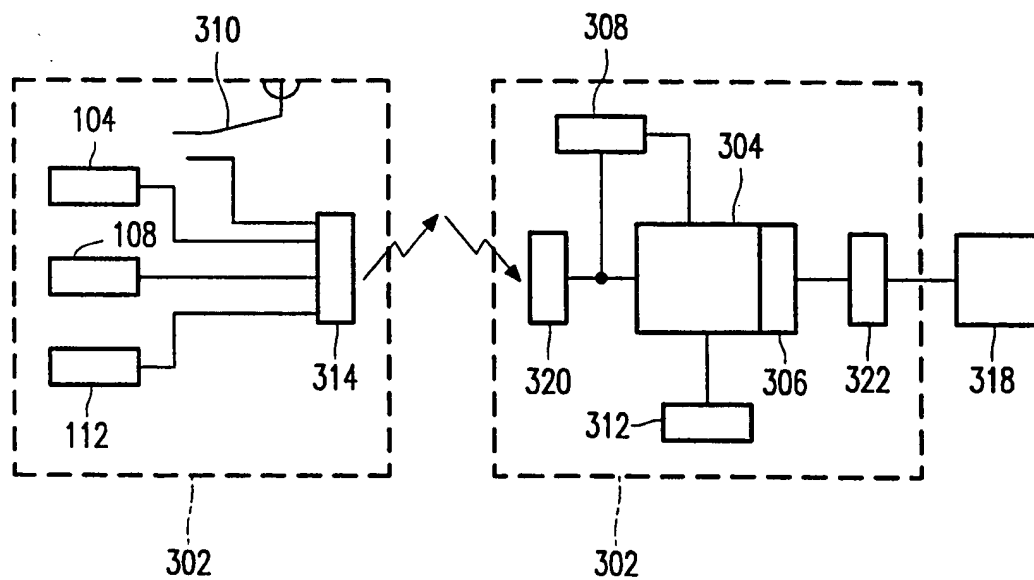


FIG. 4

3/3

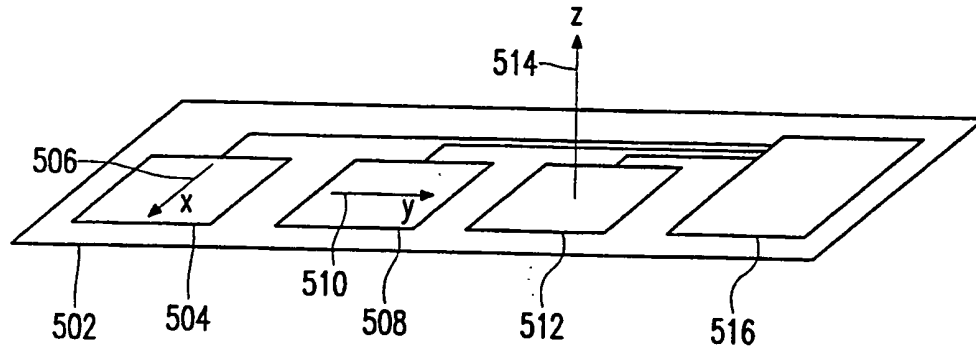


FIG. 5

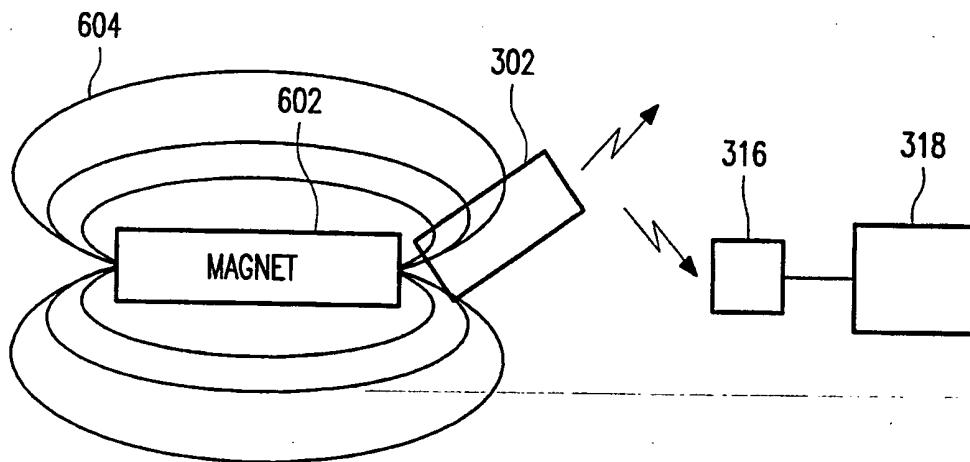


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00690

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: G06K 11/18, G06F 3/033 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: G06K, G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0718789 A2 (AT & T CORP.), 26 June 1996 (26.06.96) --	1-10
A	US 5526022 A (MICHAEL J. DONAHUE ET AL), 11 June 1996 (11.06.96) --	1-10
A	EP 0215695 A1 (COMMISSARIAT A L'ENERGIE ATOMIQUE), 25 March 1987 (25.03.87) -- -----	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
19 November 1998		23 - 11 - 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Jan Silfverling Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/11/98

International application No.

PCT/IB 98/00690

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0718789	A2	26/06/96	CA	2159251 A	20/06/96
				JP	8234900 A	13/09/96
				US	5734371 A	31/03/98

US	5526022	A	11/06/96	NONE		

EP	0215695	A1	25/03/87	CA	1314993 A	23/03/93
				FR	2586302 A,B	20/02/87
				JP	2508010 B	19/06/96
				JP	62038301 A	19/02/87
